

NEW PRODUCT BULLETIN

Newer Digital Set Top Boxes do not offer an analog coax connection for older television sets. The options are HDMI, Composite and Component.

Think of how many older TV sets are in:

- Bedrooms
- Kitchens
- Garages
- Dining Rooms, etc.



**Your subscriber loses the ability to use the Whole House DVR function, order VOD, and more without the digital set top box.*


This is costing you revenue!

Unity Solutions has developed a product that is small, inexpensive, and easy to install. Once installed, all outlets will have complete functionality and the ability to create revenue!

Increase

- Whole House DVR Usage
- Set Top Box Revenues \$\$

Contact Information:

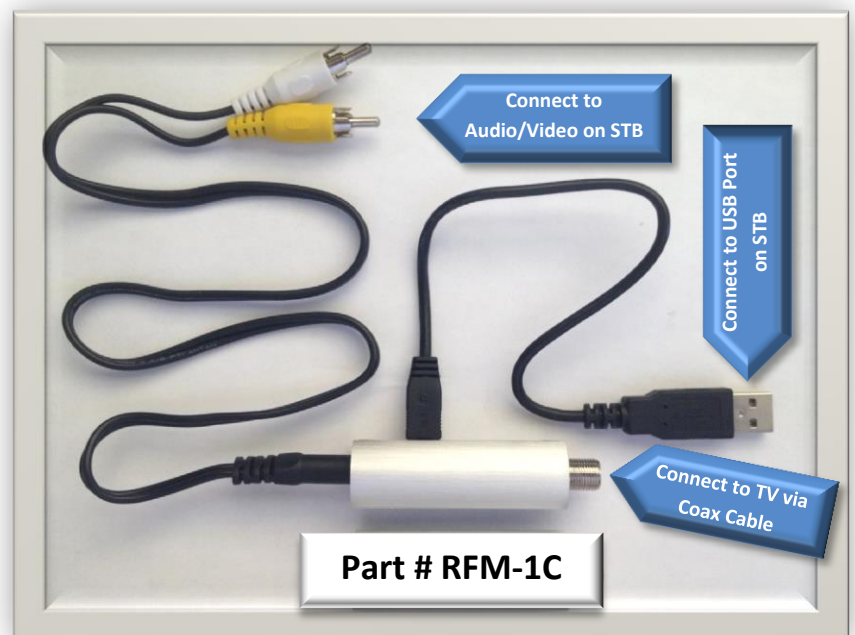

Model RFM-1C : USB powered Ch3/4 RF-Modulator for Digital STB



SPECIFICATIONS

RF

Output Frequency	: CH3 : 61.25MHz
	: CH4 : 67.25MHz
RF Output Level	: 75(±2) dBuV
Aural/Visual Carrier Ration	: -15(±2) dBc
Frequency Accuracy/Stability	: ±3K
Video Frequency Response	: ±1dB
Spurious Harmonics	: ≥50dB
Return Loss	: ≥10dB

AURAL

Audio Input Level	: 1Vp-p for ±30KHz peak Deviation
Audio Intercarriers Stability	: 4.5MHz±3k Settable about video carrier
Pre-Emphasis	: 75µs
Audio Frequency Response	: ±1dB

VISUAL

Video Input	: 1Vp-p(Load)
Video Modulation setting	: 75±5%

CONNECTORS

RF Out	: F Type
Video/Audio Input	: 3.5mm Phone Jack
POWER	: +5V(USB)

Patent Pending